



SOM-uQ7-MX8M-Mini-Nano

µQseven® standard module with NXP i.MX 8M Mini & NXP i.MX 8M Nano Processors

With NXP's first MPU built using advanced 14LPC FinFET process technology for more speed and improved power efficiency



HIGHLIGHTS



CPU

NXP i.MX 8M Mini Family / i.MX 8M Nano Family



CONNECTIVITY

Gigabit Ethernet; opt. Wi-Fi + BT 5.0; 2 x UART; opt. CAN; 5x USB 2.0; 1 PCI-e x1



GRAPHICS

GC320 2D accelerator + GCNanoUltra 3D accelerator



MEMORY

Soldered on-board DDR4-2400 Memory



MAIN FIELDS OF APPLICATION



Coffee & Vending



Smart Devices



Energy & Utilities






FEATURES

Processor	NXP i.MX 8M Mini Family based on Arm® Cortex®-A53 cores + general purpose Cortex®-M4 400MHz processor:	Graphics	i.MX 8M Mini Family of processors: Vivante GC320 2D accelerator + GCNanoUltra 3D accelerator OpenGL ES 2.0, OpenVG 1.1 support i.MX 8M Nano Family of processors: Vivante GC7000UL 2D/3D GPU OpenGL ES 3.1, OpenCL1.2, Vulkan support
	<ul style="list-style-type: none"> i.MX 8M Mini Quad - Full featured, 4x Cortex®-A53 cores up to 1.8GHz i.MX 8M Mini Dual - Full featured, 2x Cortex®-A53 cores up to 1.8GHz i.MX 8M Mini Solo - Full featured, 1x Cortex®-A53 cores up to 1.8GHz i.MX 8M Mini Quad Lite - 4x Cortex®-A53 cores up to 1.8GHz, no VPU i.MX 8M Mini Dual Lite - 2x Cortex®-A53 cores up to 1.8GHz, no VPU i.MX 8M Mini Solo Lite - 1x Cortex®-A53 cores up to 1.8GHz, no VPU 		Only for i.MX 8M Mini Family, not for Lite processors, embedded VPU able to offer: VP9, HEVC/H.265, AVC/H.264, VP8 HW Decoding AVC/H.264, VP8 HW encoding
Max Cores	NXP i.MX 8M Nano Family based on Arm® Cortex®-A53 cores + general purpose Cortex®-M7 750MHz processor:	Video Interfaces	Single/Dual Channel 18/24 bit LVDS interface or eDP interface
	<ul style="list-style-type: none"> i.MX 8M Nano Quad - Full featured, 4x Cortex®-A53 cores up to 1.5GHz i.MX 8M Nano Dual - Full featured, 2x Cortex®-A53 cores up to 1.5GHz i.MX 8M Nano Solo - Full featured, 1x Cortex®-A53 cores up to 1.5GHz i.MX 8M Nano Quad Lite - 4x Cortex®-A53 cores up to 1.5GHz, no VPU i.MX 8M Nano Dual Lite - 2x Cortex®-A53 cores up to 1.5GHz, no VPU i.MX 8M Nano Solo Lite - 1x Cortex®-A53 cores up to 1.8GHz, no VPU 	Video Resolution	Up to 1920 x 1080p
Memory	Soldered Down onboard DDR4 memory: Up to 4GB of DDR4-2400, 32-bit bus memory (i.MX8M Mini) Up to 2GB of DDR4-2400, 16-bit bus memory (i.MX8M Nano)	Mass Storage	eMMC 5.1 drive on-board, up to 64GB SD / MMC / SDIO interface Optional QSPI Flash for booting
		Networking	Gigabit Ethernet interface Optional WiFi 802.11 a/b/g/n/ac + BT 5.0 NGFF module soldered on-board
		USB	5x USB 2.0 Host ports (i.MX 8M Mini) 4x USB 2.0 Host ports (i.MX 8M Nano)
		PCI-e	1 x PCI Express x1 lane (only with i.MX 8M Mini)
		Audio	I2S Audio Interface
		Serial Ports	1x 4-wire UART + 1 x Debug UART Optional CAN interface


SOM-uQ7-MX8M-Mini-Nano

μQseven® standard module with NXP i.MX 8M Mini & NXP i.MX 8M Nano Processors

FEATURES

 Other Interfaces	SPI interface Watchdog 8x GPIO SM Bus I2C interface	 Operating Temperature* 0°C ÷ +60 °C (commercial temp.) -30°C ÷ +85°C (extended temp.)
 Power Supply	+5V _{DC} and +5V _{SB} (optional)	 Dimensions 40 x 70 mm (μQseven, 1.57" x 2.76")
 Operating System	Linux (Yocto)	*Measured at any point of SECO standard heatspreader for this product, during any and all times (including start-up). Actual temperature will widely depend on application, enclosure and/or environment. Upon customer to consider application-specific cooling solutions for the final system to keep the heatspreader temperature in the range indicated.

BLOCK DIAGRAM

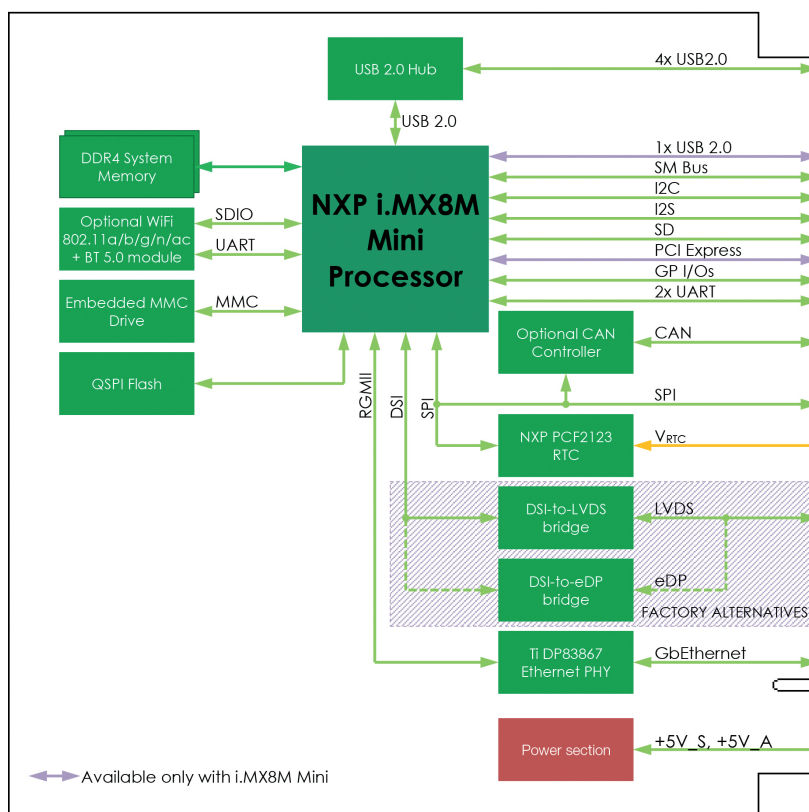

Streamline and expedite your edge computing implementations

EDGEHOG OS

A flexible operating system that adapts to your needs, thanks to the customization tool and Docker support. Reliability and security are built-in through a dual-partition system and native integration with Exein's robust AI-based protection.

DATA ORCHESTRATION


Integrate third-party services, simplify data flows and analysis, and enhance business efficiency by enabling easy and fast utilization of AI.

DEVICE MANAGER

Update, configure, and manage remote devices. Optimize time and costs to maximize operational efficiency and security without the need for costly field interventions.

PORTAL

Analyze data from remote devices, customize the user experience with applications tailored to user needs, and manage user rights, company access, and tenant privileges.

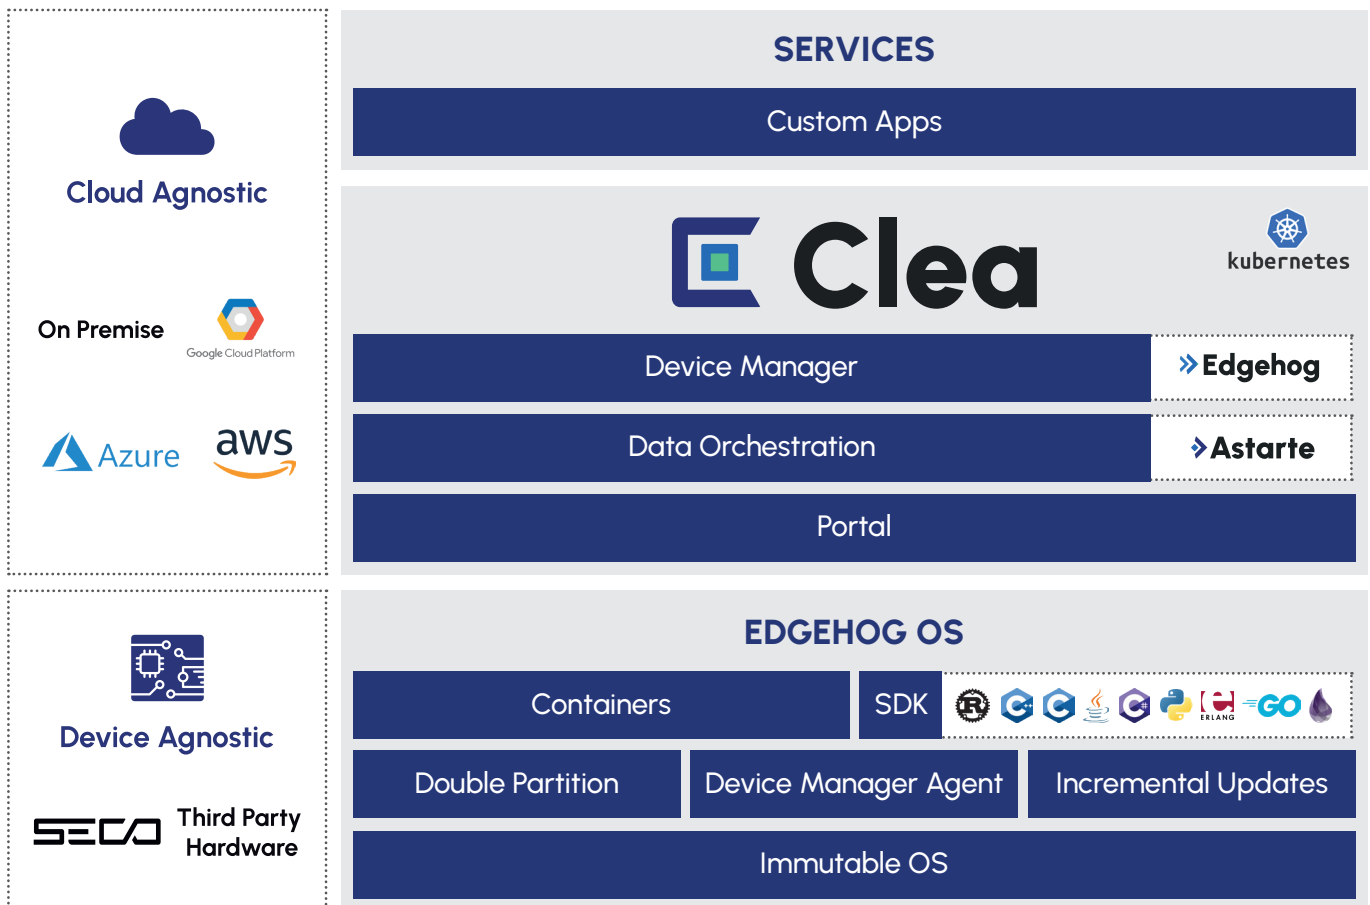

Scan to know more about our solution

EDGEHOG OS



CLEA DOCS

